

# HydrauCalc

2019a Release

[www.hydraucalc.com](http://www.hydraucalc.com)

## APPLICATION DESCRIPTION

## APPLICATION DESCRIPTION

HydrauCalc is a software application that allows accurate modeling and calculating of stabilized flows in piping elements as straight pipes, bends, changes of cross-section, tees, valves, orifices and more.

HydrauCalc is particularly suitable for pre-projects because it allows to estimate quickly the pressure losses of the components of a hydraulic installation, and thus to specify the characteristics of the pumps.

Friction Loss is calculated using the Darcy-Weisbach method, which provides accurate results for non-compressible fluids (liquids). This method also provides satisfactory results of reasonable accuracy for compressible fluids (gases) when the flow velocity is not very high.

HydrauCalc is mainly based on well-known and respected references in the field of fluid flow and pressure drop calculation.


## THE REFERENCES

## MAINLY REFERENCES

- [1] Handbook of Hydraulic Resistance, I.E. Idelchik
- [2] Internal Flow System, D.S. Miller
- [3] CRANE - Flow of Fluids Through Valves, Fitting and Pipe - Technical Paper No. 410
- [4] Pipe Flow - A Practical and Comprehensive Guide, D. C. Rennels, H. M. Hudson

## THE GRAPHICAL USER INTERFACE

# GRAPHICAL USER INTERFACE

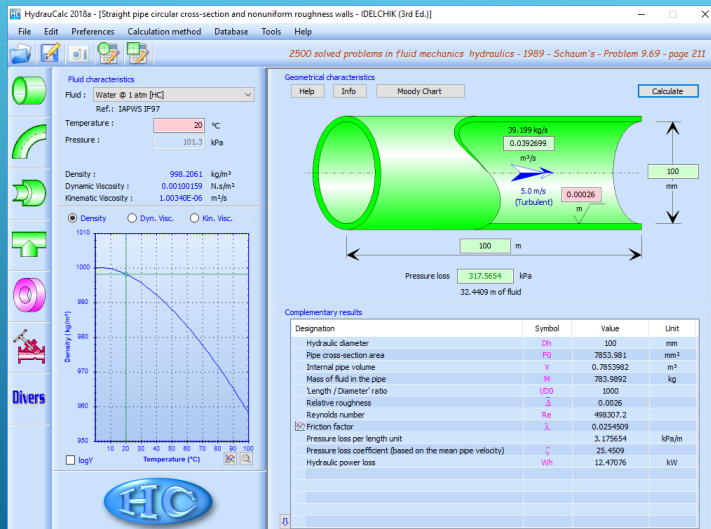

HydraulCalc - © François Corre 2017-2019

The graphical user interface is available in English or in French.


From this interface, the user selects the type of component he wants to calculate and the fluid carried in this component. It also provides the necessary input data (fluid and flow characteristics and component geometry).

This interface is intuitive and very easy-to-use.

7

22/03/2019

# GRAPHICAL INTERFACE STRUCTURE

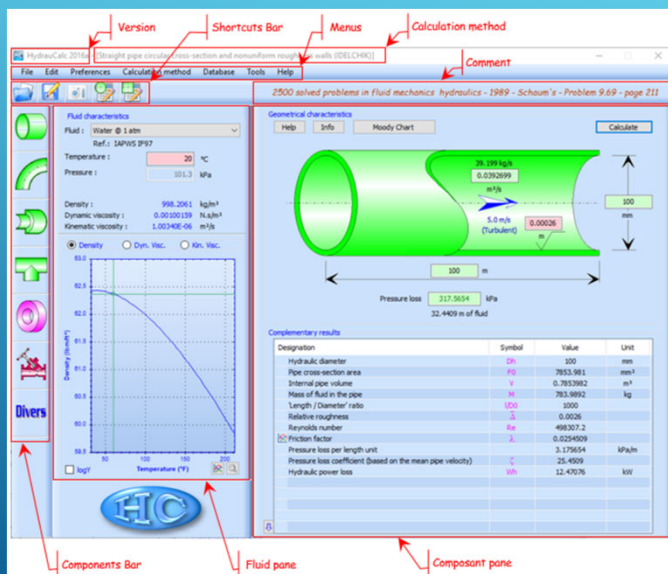

The graphical interface is structured in four main parts:

- ❑ The components bar
- ❑ The fluid pane
- ❑ The component pane
- ❑ The upper part which includes:
  - ❑ The information about release and calculation method chosen
  - ❑ Menus and shortcuts bar
  - ❑ The display area for a possible comment

8

HydraulCalc - © François Corre 2017-2019

22/03/2019

## COMPONENTS BAR




The vertical components bar makes it possible to select a family of components (straight pipes, bends, changes of cross-section, tees, restriction and measurement orifices, valves, ...)

Selecting a family displays the available components for that family in one or more horizontal bars.

The shaded components are under development and will be available in a future release.


## FLUID PANE

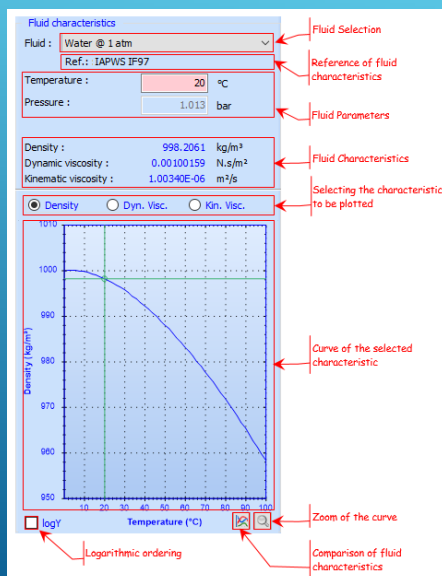

The fluid pane mainly allows:

- ❑ Select the fluid
- ❑ Set the fluid according to the selected fluid type (temperature, pressure, salinity, quality, humidity, ...)
- ❑ Visualize the characteristics of the fluid (density, dynamic and kinematic viscosity)
- ❑ Visualize the evolution of the characteristics according to the temperature or the pressure (according to the type of selected fluid)


# COMPONENT PANE

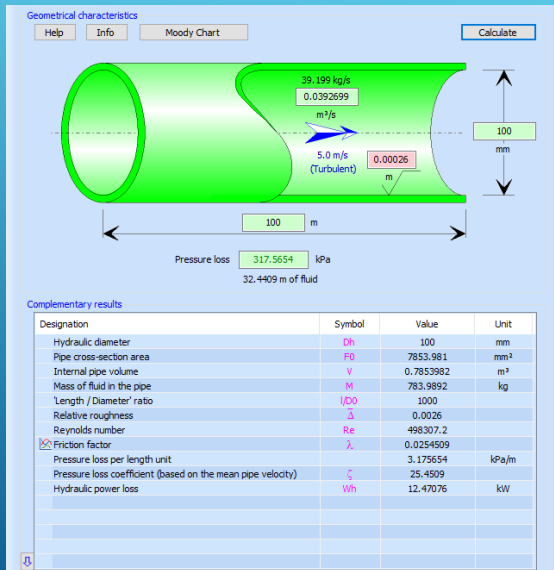


The component pane allows you to:

- Define the geometry of the component according to the selected component type (inside diameter, length, roughness, ...)
- Define flow (volume flow rate)
- To execute the calculation of the component
- To visualize the results
- To display the Moody diagram corresponding to the calculation with the calculated point (case of friction loss)
- Access information about the component:
  - Help (technical documentation of the component)
  - Info (information on the use of the component)
  - Other eventually

# COMPLEMENTARY RESULTS

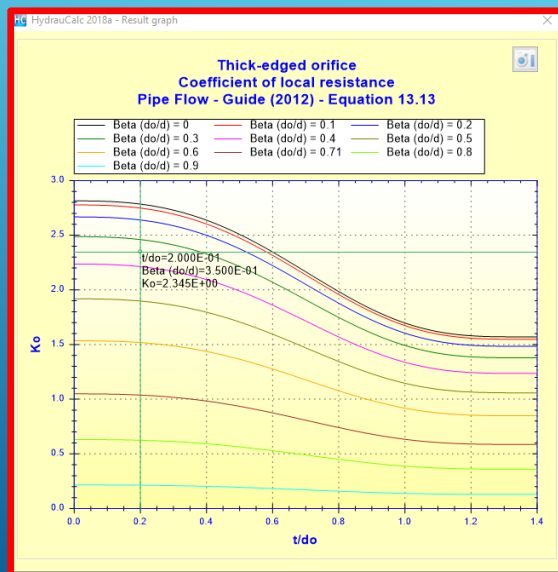


When, in the complementary results, the variable is preceded by the symbol , a simple click on this variable shows the evolution graph of the variable with the calculated point.

Example :


Designation	Symbol	Value	Unit
Pipe cross-section area	$A$	7853.981	mm²
Orifice cross-section area	$A_o$	962.1127	mm²
Diameters ratio (Do/d)	$\beta$	0.35	
Cross-sections area ratio	$A_o/A$	0.1225	
Thickness to orifice diameter ratio	$t/Do$	0.2	
Pipe Reynolds number	$NR_e$	498307.2	
Orifice Reynolds number	$NR_{eO}$	1423735	
Velocity in vena contracta	$V_c$	65.43075	m/s
Jet velocity ratio (Equation 13.4)	$\lambda$	1.603054	
Coefficient Cth (Equation 13.14)	$C_{th}$	0.9763061	
Coefficient of local resistance (Equation 13.13)	$K_o$	2.34488	
Pressure loss coefficient (based on the mean pipe velocity)	$K$	156.2602	
Hydraulic power loss	$Wh$	76.56641	kW

# MOODY DIAGRAM

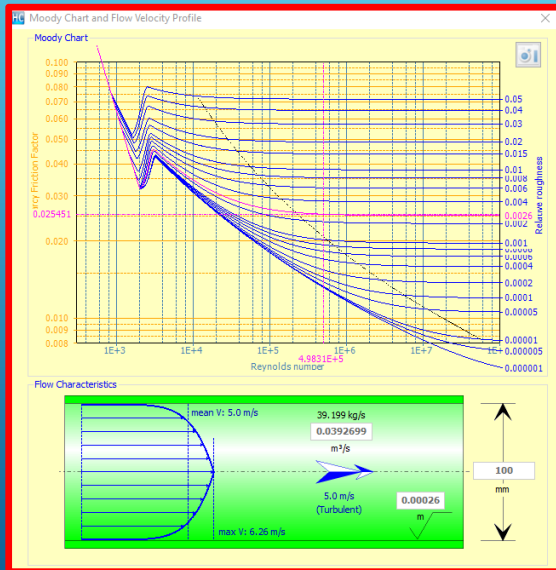


When the component is subjected to friction, the Moody diagram can be consulted to observe the operating point (as well as the flow velocity profile).

Example of a straight pipe:

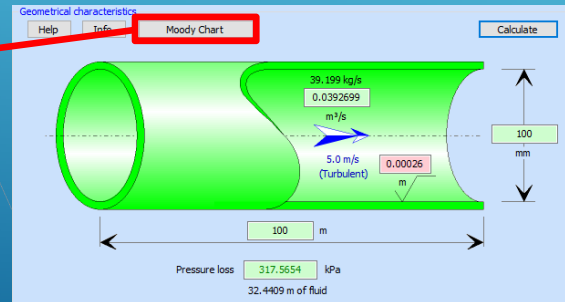


# GRID PLOT

New 2019a

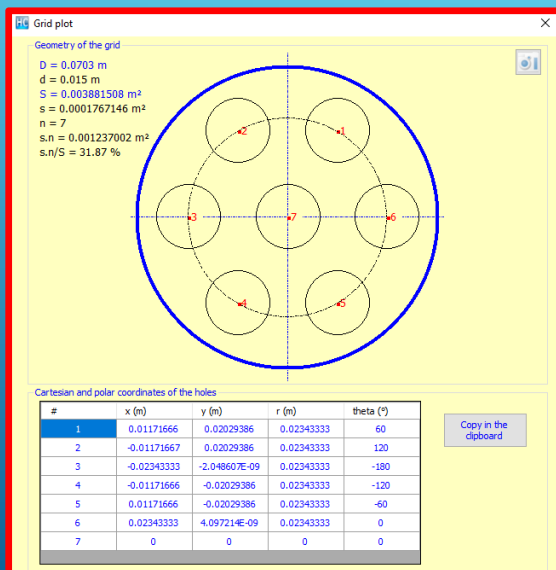


For "Grid" components (perforated plate), the application provides a grid plot with the coordinates of each hole.

Example of a perforated plate plot:

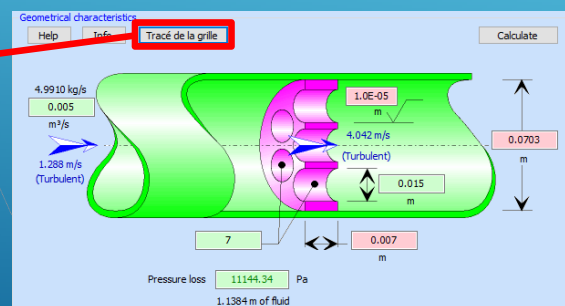


# THE COMPONENTS


## STRAIGHT PIPES




Circular cross-section



Rectangular cross-section



Triangular cross-section



Annular cross-section

### The proposed calculation methods:


- ❑ IDELCHIK
  - ❑ Uniform roughness walls (Nikuradze equation)
  - ❑ Nonuniform roughness walls (Colebrook-White equation)
  - ❑ Smooth roughness walls (Filonenko and Altsul equation)
  - ❑ Explicit Darcy friction factor
- ❑ MILLER
  - ❑ Roughness walls (Swamee-Jain equation)
  - ❑ Explicit Darcy friction factor

### The proposed calculations:


- ❑ Pressure loss
- ❑ Volume flow rate
- ❑ Length of pipe
- ❑ Inside diameter (circular cross-section)
- ❑ Height or width (rectangular cross-section)
- ❑ Height or base (triangular cross-section)




## BENDS




Smooth bend with circular and rectangular cross-section



Miter bend with circular and rectangular cross-section

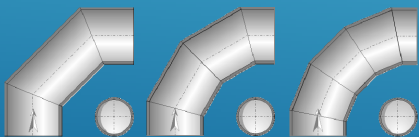

Composite bend with circular cross-section



Helical tube

HydrauCalc - © François Corre 2017-2019

The proposed calculation methods:

- ☐ IDELCHIK
- ☐ MILLER
- ☐ CRANE
- ☐ Pipe Flow Guide


The proposed calculations:

- ☐ Pressure loss
- ☐ Volume flow rate


17

3/22/2019


## CHANGES OF CROSS-SECTION




Sudden expansion




Sudden contraction sharp




Sudden contraction rounded



Sudden contraction bevelled



Gradual expansion



Gradual contraction

HydrauCalc - © François Corre 2017-2019

The proposed calculation methods:

- ☐ IDELCHIK
- ☐ MILLER
- ☐ CRANE
- ☐ Pipe Flow Guide


The proposed calculations:

- ☐ Pressure loss
- ☐ Volume flow rate

18

22/03/2019

## ENTRANCE AND DISCHARGE

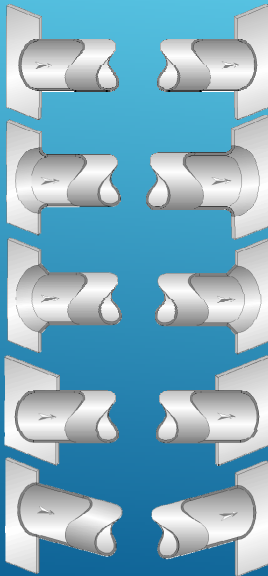

Flush-mounted sharp-edged entrance and discharge

Flush-mounted rounded entrance and discharge

Flush-mounted beveled entrance and discharge

Sharp-edged entrance and discharge mounted at a distance

Sharp-edged entrance and discharge mounted at an angle

HydrauCalc - © François Corre 2017-2019

The proposed calculation methods:

- ☐ IDELCHIK
- ☐ MILLER
- ☐ CRANE
- ☐ Pipe Flow Guide

The proposed calculations:


- ☐ Pressure loss

19


22/03/2019

## JUNCTIONS


New 2019a




Combining sharp-edged junction



Dividing sharp-edged junction



Symmetric combining sharp-edged T-junction



Symmetric dividing sharp-edged T-junction

HydrauCalc - © François Corre 2017-2019

The proposed calculation methods:

- ☐ IDELCHIK
- ☐ MILLER
- ☐ CRANE


The proposed calculations:

- ☐ Pressure loss in each branch


20

22/03/2019


## JUNCTIONS (FOLLOWING)




Combining radiused-edged T-junction



Dividing radiused-edged T-junction



Symmetric combining radiused-edged T-junction



Symmetric dividing radiused-edged T-junction

HydrauCalc - © François Corre 2017-2019

The proposed calculation methods:

- ☐ Pipe Flow Guide


The proposed calculations:

- ☐ Pressure loss in each branch


21

22/03/2019

## RESTRICTION ORIFICES



Thick-edged orifice  
(with or without change of  
pipe diameter)



Sharp-edged orifice  
(with or without change of  
pipe diameter)



Bevelled-edged orifice  
(with or without change of  
pipe diameter)



Radiused-edged orifice  
(with or without change of  
pipe diameter)

HydrauCalc - © François Corre 2017-2019

The proposed calculation methods:

- ☐ IDELCHIK
- ☐ MILLER
- ☐ CRANE
- ☐ Pipe Flow Guide


The proposed calculations:

- ☐ Pressure loss
- ☐ Volume flow rate
- ☐ Orifice diameter

22


22/03/2019

## GRIDS




**New 2019a**


Thick-edged grid



Sharp-edged grid



Bevelled-edged grid



Radiused-edged grid

HydrauCalc - © François Corre 2017-2019

The proposed calculation methods:

- ☐ IDELCHIK
- ☐ MILLER
- ☐ Pipe Flow Guide


The proposed calculations:

- ☐ Pressure loss
- ☐ Volume flow rate
- ☐ Holes diameter
- ☐ Holes number

23


22/03/2019

## MEASUREMENT ORIFICES




**New 2019a**

Orifice plate flowmeter



Nozzle and Venturi nozzle flowmeter



Venturi tube flowmeter

HydrauCalc - © François Corre 2017-2019

The proposed calculation methods:

- ☐ ISO 5167:2003
- ☐ ISO 5167:1991
- ☐ CRANE 1999


The proposed calculations:

- ☐ Measured differential pressure
- ☐ Net pressure loss
- ☐ Volume flow rate
- ☐ Orifice diameter


24

22/03/2019


## VALVES



Y valve



Ball valve



Butterfly valve

HydrauCalc - © François Corre 2017-2019

The proposed calculation methods:

- ☐ IDELCHIK
- ☐ Manufacturers


The proposed calculations:

- ☐ Pressure loss

25

22/03/2019

## CHECK VALVES



Swing check valve



Lift check valve

HydrauCalc - © François Corre 2017-2019

The proposed calculation methods:

- ☐ IDELCHIK
- ☐ Manufacturers

The proposed calculations:

- ☐ Pressure loss

26

22/03/2019

# THE MEASURE UNITS

## UNIT SYSTEM SELECTION

Unit system selection

Length unit  
meter (m)

Diameter and radius unit  
millimeter (mm)

Thickness unit  
meter (m)

Absolute roughness unit  
meter (m)

Temperature unit  
degree Celsius (°C)

Pressure unit  
kilopascal (kPa)

Hydraulic load unit  
meter (m)

Velocity unit  
meter per second (m/s)

Volume flow rate unit  
cubic meter per second (m³/s)

Mass flow rate unit  
kilogram per second (kg/s)

Density unit  
kilogram per cubic meter (kg/m³)

Dynamic viscosity unit  
Newton second per square meter (N.s/m²)

Kinematic viscosity unit  
square meter per second (m²/s)

Mass unit  
kilogram (kg)

Power unit  
kilowatt (kW)

OK

Cancel

Load unit system

SI unit

SI unit (°C)

SI unit (°C, bar)

Imperial unit

CGS unit

MKgS unit

MTS unit

USCS unit

User unit 1

User unit 2

User unit 3

Define unit system

Define as user unit 1

Define as user unit 2


Define as user unit 3

Units can be selected:

- individually
- by unit systems

The user can define his own systems of units (within the limit of three systems)

# UNITS MODIFICATION

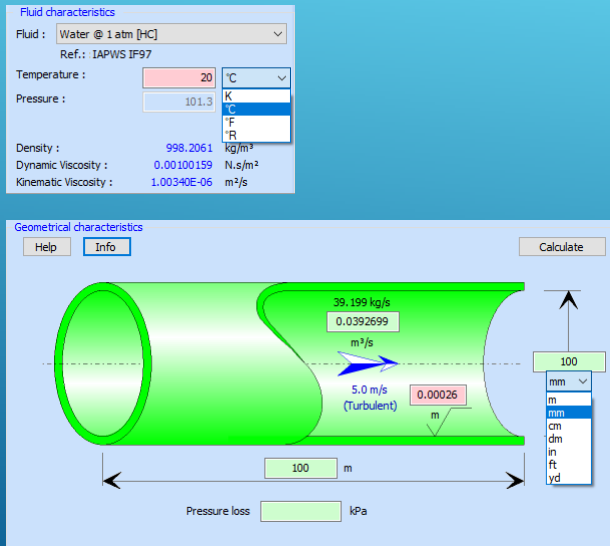

The application has a dynamic unit conversion engine.


The units displayed in the Fluid Pane and Component Data Panes can be changed by simply clicking on the unit displayed.

After selecting a new unit, the value entered in the input box is automatically converted to the new unit.

The results will be displayed in the current units.

# THE DATABASES

# DATABASE - FLUIDS

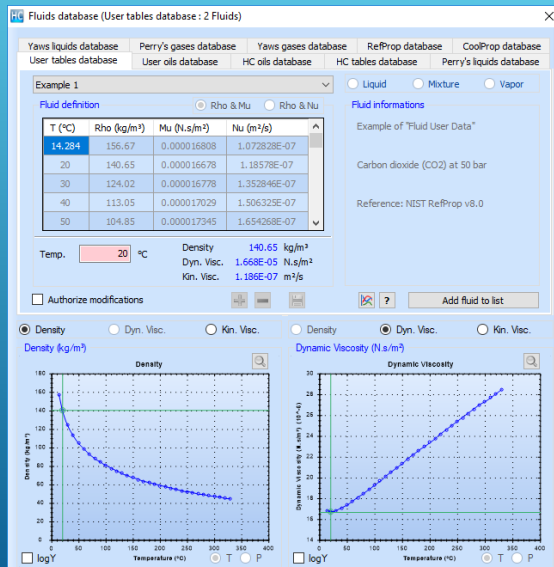

HydrauCalc has a fluid characteristics database consisting of several hundred fluids based on recognized references:

- Perry's Handbook
- Oil products
- Yaws Handbook
- Coolprop **New 2019a**
- Refprop (coming soon ...)

The user can also define his own fluids in the form of point tables as a function of temperature.

HydrauCalc - © François Corre 2017-2019

31  
3/22/2019

# DATABASE - PIPINGS

DN	Outside diameter (mm)	Wall Thickness (mm)	Inside diameter (mm)	Area (mm²)
6	10.2	0.5	9.2	66.47626
6	10.2	0.6	9	63.6174
6	10.2	0.8	8.6	58.08818
6	10.2	1	8.2	52.8103
6	10.2	1.2	7.8	47.78374
6	10.2	1.4	7.4	43.0085
6	10.2	1.6	7	38.4846
6	10.2	1.8	6.6	34.21202
6	10.2	2	6.2	30.19078
6	10.2	2.3	5.6	24.63014
6	10.2	2.6	5	19.635
8	13.5	0.5	12.5	122.7188
8	13.5	0.6	12.3	118.8232
8	13.5	0.8	11.9	111.2205
8	13.5	1	11.5	103.8691
8	13.5	1.2	11.1	96.76913
8	13.5	1.4	10.7	89.92045
8	13.5	1.6	10.3	83.32309
8	13.5	1.8	9.9	76.97705
8	13.5	2	9.5	70.82235
8	13.5	2.3	8.9	62.21153
8	13.5	2.6	8.3	54.1062
8	13.5	2.9	7.7	46.56636
8	13.5	3.2	7.1	39.59201
8	13.5	3.6	6.3	31.17253
10	17.2	0.5	16.2	206.1204
10	17.2	0.6	16	201.0624
10	17.2	0.8	15.6	191.1349

HydrauCalc has a database defining the diameters of the main pipe standards.

- Steel piping
- Stainless steel piping
- Copper piping
- PVC piping
- Aluminium piping
- Cast iron piping
- Black and galvanized steel piping

The user can also add his own diameter tables.

HydrauCalc - © François Corre 2017-2019

32  
22/03/2019



## DATABASE - WALL ROUGHNESSES

[illegible]

HydrauCalc has a database of values of absolute roughness of pipe wall from recognized references:

- MILLER
- ISO 5167-1 2003
- Fluid Mechanics - F. White
- IDELCHIK
- Pipe Flow Guide

33

22/03/2019

## THE TOOLS

34

3/22/2019

## TOOL - CALCULATOR FOR CIRCULAR CROSS-SECTIONS

General Head Drop Formulas  
for Steady State and Incompressible Fluid

Formulation

$$\Delta P = 1/2 \cdot \zeta \cdot \rho \cdot V^2$$

$$\zeta = \lambda \cdot L / d$$

$$Q_v = V \cdot S$$

$$S = \pi \cdot d^2 / 4$$

$$Q_m = \rho \cdot Q_v$$

$$Re = V \cdot d / \nu$$

$$Av = Q_v \cdot (\rho / \Delta P)^{0.5}$$

$$Cv = 41650 \cdot Av$$

$$Kv = 36023 \cdot Av$$

$$Cv = 1.15620 \cdot Kv$$

$$\zeta = 2 \cdot S^2 / Av^2$$

$$\Delta h = \Delta P / (\rho \cdot g)$$

$$Wh = \Delta P \cdot Q_v$$

$$\nu = \mu / \rho$$

Numerical application

☐  $\Delta P$  = 1699.584 lbf/ft<sup>2</sup>

☐  $\zeta$  = 20.85395

☐  $\lambda$  = 0.01737829

☒  $L$  = 200 ft

☒  $V$  = 9.17 ft/s

☐  $Q_v$  = 0.2000584 ft<sup>3</sup>/s

☒  $d$  = 2 in

☐  $S$  = 3.141593 in<sup>2</sup>

☐  $Q_m$  = 5.659446 kg/s

☐  $Re$  = 126532.3


☐  $Av$  = 0.0006276798 m<sup>3</sup>


☐  $Cv$  = 26.14297 USG/min

☐  $Kv$  = 22.61094 m<sup>3</sup>/h

☐  $\Delta h$  = 27.25155 ft of fluid

☒  $Wh$  = 461 W



 Check the input data

Reset

The application allows, from known input data and for circular cross-sections, to automatically calculate those that can be deduced.

It is thus possible to determine the volume flow rate corresponding, for example, to an imposed mean velocity, so as to inform the input data of the components.

## TOOL - CALCULATOR FOR RECTANGULAR CROSS-SECTIONS

General Head Drop Formulas  
for Steady State and Incompressible Fluid

Formulation

$$\Delta P = 1/2 \cdot \zeta \cdot \rho \cdot V^2$$

$$\zeta = \lambda \cdot L / dh$$

$$Q_v = V \cdot S$$

$$S = a \cdot b$$

$$P = 2 \cdot (a + b)$$

$$dh = 4 \cdot S / P$$

$$Q_m = \rho \cdot Q_v$$

$$Re = V \cdot dh / \nu$$

$$Av = Q_v \cdot (\rho / \Delta P)$$

$$Cv = 41650 \cdot Av$$

$$Kv = 36023 \cdot Av$$

$$Cv = 1.15620 \cdot Kv$$

$$\zeta = 2 \cdot S^2 / Av^2$$

$$\Delta h = \Delta P / (\rho \cdot g)$$

$$Wh = \Delta P \cdot Q_v$$

$$\nu = \mu / \rho$$

Numerical application

☐  $\Delta P$  = 23.38326 Pa

☐  $\zeta$  = 0.8365216

☐  $\lambda$  = 0.02048625

☒  $L$  = 7 m

☐  $V$  = 6.985055 m/s

☐  $Q_v$  = 0.2095516 m<sup>3</sup>/s

☒  $a$  = 15 cm

☒  $b$  = 20 cm

☐  $P$  = 69.99998 cm

☐  $S$  = 300 cm<sup>2</sup>

☐  $dh$  = 17.14286 cm

☐  $Q_m$  = 0.2401094 kg/s

☒  $Re$  = 72490


☐  $Av$  = 0.04638713 m<sup>3</sup>


☐  $Cv$  = 1932.032 USG/min

☐  $Kv$  = 1671.006 m<sup>3</sup>/h

☐  $\Delta h$  = 2.080971 m of fluid

☒  $Wh$  = 4.9 W




 Check the input data

Reset

The application also makes it possible, from known input data and for rectangular cross-sections, to calculate those that can be deduced from it.

It is thus possible to determine the volume flow rate corresponding, for example, to an imposed Reynolds number, so as to inform the input data of the components.

## TOOL - UNITS CONVERSION

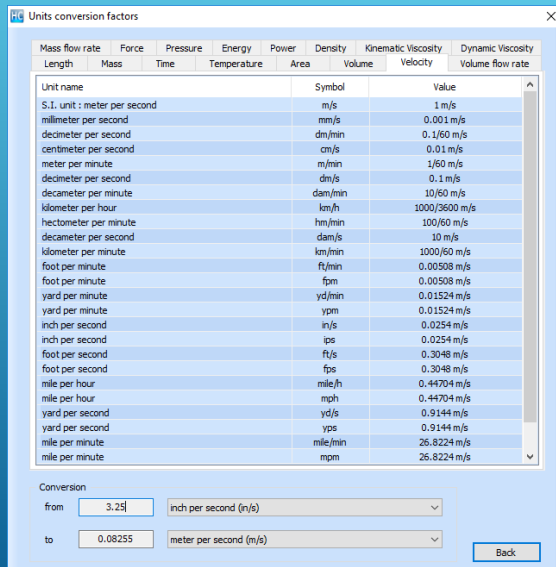


The application has a tool allowing:

- to view the conversion factors of the measurement units integrated in the application,
- to convert together units of measurement of the same physical size.

HydrauCalc - © François Corre 2017-2019

37  
22/03/2019

## TOOL - MOODY DIAGRAM

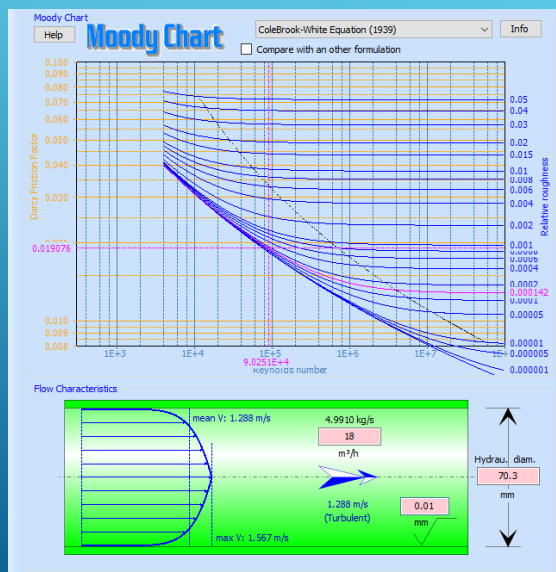


The application has a tool to calculate the coefficient of friction from more than 40 other formulations published by recognized scientists. The curves of iso-values of relative roughness are plotted in a Moody diagram and the calculated point is presented.

The velocity profile of the flow corresponding to the calculation point is also plotted in a pipe of same hydraulic diameter as that of the component.

HydrauCalc - © François Corre 2017-2019

38  
22/03/2019

## TOOL - MOODY DIAGRAM (FOLLOWING)

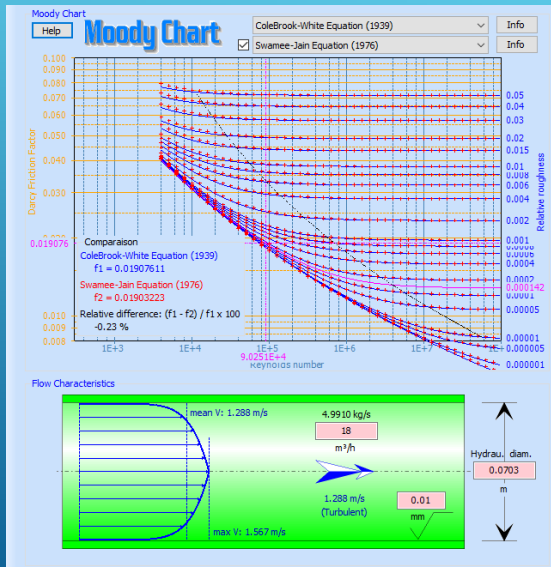

HydrauCalc - © François Corre 2017-2019


This tool also makes it possible to compare two different formulations for determining the Darcy friction coefficient.

The relative error found at the calculation point is calculated and displayed on the diagram.

39

22/03/2019

## TOOL - FLUID COMPARATOR

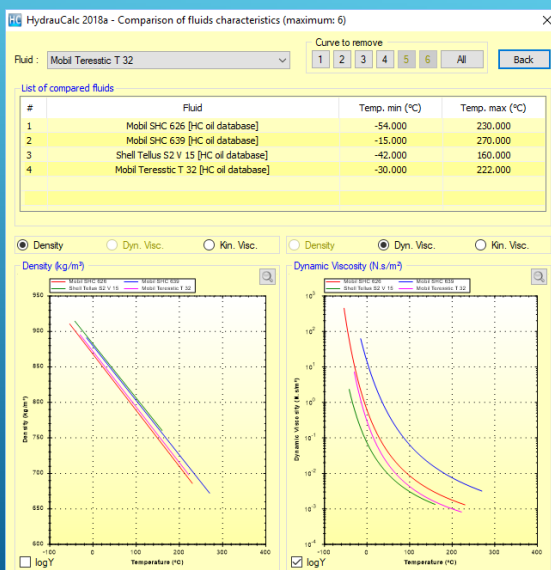

HydrauCalc - © François Corre 2017-2019


The application has a tool to compare the characteristics of the fluids integrated in the application or defined by the user (density, dynamic viscosity and kinematic viscosity).


40

22/03/2019

# THE CALCULATION REPORT

## CALCULATION REPORT

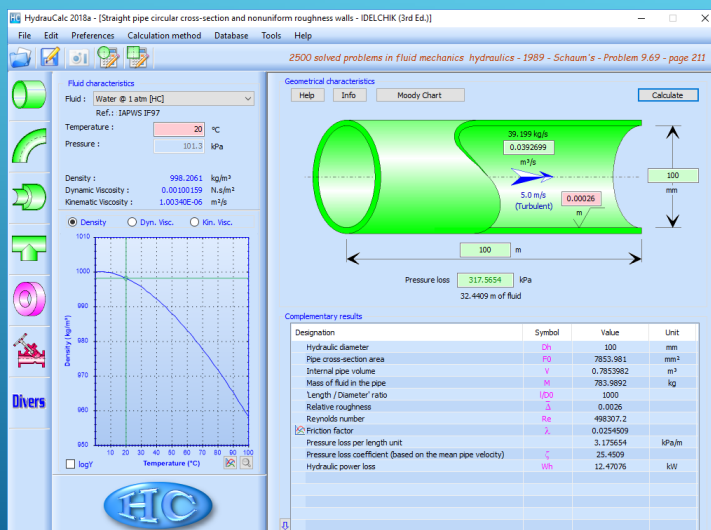

To include a calculation result in a document, it is possible to copy the window using the button  and paste it into the document.

The screenshot contains all the data used for the calculation and the results:

- in the title bar:
  - the release of the application,
  - the type of component calculated and the calculation method used,
- in the fluid pane:
  - the characteristics of the fluid used,
- in the component pane:
  - the input data of the component,
  - the desired main result (value in green color),
  - the additional results from the calculation.

43  
22/03/2019

44  
22/03/2019

## COMPONENTS MODEL VALIDATION

HydrauCalc comes with a document that provides a comparison of software results with a series of examples published in well-known and respected references. Examples of hydraulic analysis include calculations of flow, pressure drop and pipe sizing for compressible and incompressible fluids.

The results obtained by the HydrauCalc application are very close to the published results.

At each new software release, a series of tests is performed to check the non-regression of the software features.

## THE ROAD MAP

# ROAD MAP

Next release (2019b release):

- Add new components

Following releases:

- Gradually complete all components
- Develop an Excel function library
- Develop a .NET class library (API) that can be used with various programming languages, including C #, F # and Visual Basic ...

# HydrauCalc

2019a Release

[www.hydraucalc.com](http://www.hydraucalc.com)